

10W Single Output Switching Power Supply

HF10W-SL Series



FEATURES

- Universal AC input / full range
- Japanese brand components for key parts
- Electrolytic capacitors all 105°C
- 100% full load burn-in test
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F601 100 x 58 x 31mm

SPECIFICATIONS

Input Voltage	85~264VAC (120~370VDC)
Input Current	0.3A
Input Frequency	47~63Hz
Inrush Current	cold start, 15A/115V, 30A/230V
Input Leakage Current	< 0.7mA/230VAC
Line Regulation (full load)	± 0.5%
Voltage Adjust Range	± 10%
Output Overload Protection	built-in IC protection, hiccup mode, auto recovery
Output Over Voltage Protection	clamping by zenor diode
Short Circuit Protection	hiccup mode, auto recovery
Rise Time	50ms @full load (typical)
Hold up Time	20ms @full load (typical)
Mechanical Feature	enclosed
Dimensions	100 x 58 x 31mm (L x W x H)

Operating Temperature	-20°C ~+70°C(ref. derating curve)
Storage Temperature	-20°C ~+85°C
Operating Humidity	20%~93%RH(non condensing)
Storage Humidity	20%~95%RH(non condensing)
MTBF	>100,000 hours
Cooling	convection
Safety Standards	GB4943, UL60950, EN60950
EMC Standards	GB9254, EN55022 Class B EN55024, EN61000-3-2,3 EN61000-4-2,3,4,5,6,8,11
Withstand Voltage	I/P -O/P: 3.0KVAC/1min I/P - PE: 1.5KVAC/1min O/P-PE: 0.5KVAC/1min
Vibration	10~150Hz, 2G 10min/1cycle, 30min each along X, Y, Z axes
Connection	3P/7.5mm 4P/5.0mm, screw terminal block
Packing	0.15kgs, 108pcs/18kgs/0.032CBM per carton


Model No.	DC Output	Rated Power	Load Regulation	Voltage Tolerance	Ripple & Noise (max.)	Efficiency
HF10W-SL-5	5V 2.0A	10.0W	0.5%	± 2%	80mVp-p	71%
HF10W-SL-12	12V 0.85A	10.2W	0.5%	± 1%	120mVp-p	76%
HF10W-SL-15	15V 0.7A	10.5W	0.5%	± 1%	120mVp-p	76%
HF10W-SL-24	24V 0.4A	9.6W	0.5%	± 1%	150mVp-p	77%
HF10W-SL-48	48V 0.2A	9.6W	0.5%	± 1%	150mVp-p	79%

* 3~48VDC output all available

NOTE

1. All parameters are measured at 230VAC input, rated load and 25°C ambient temperature.
2. Line regulation is measured from low line to high line at rated load.
3. Load regulation is measured from 0% to 100% of rated load for single output models. For multi-output models, it is measured from 20% to 100% of rated load, and other output at 60% rated load.
4. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.
5. The power supply is regarded as a component which will be installed into the final equipment. The final equipment must be re-confirmed that it still meets EMC directives.

Drawing

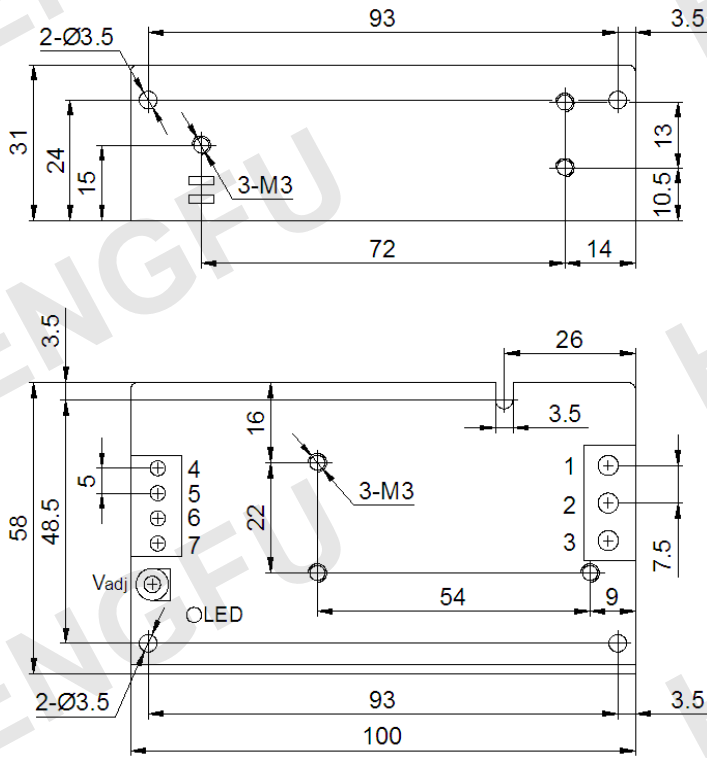

Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4,5	DC OUTPUT -V
2	AC/N	6,7	DC OUTPUT +V
3	PE		

Derating Curve

